


## 3 Ton S Series

### *Self-Contained Reliable Cooling*

This durable chiller offers an indoor or outdoor design and provides the utmost in reliable operation and precise temperature control. A standard product offering with a wide range of options, this chiller can provide cooling in most applications and is available from 3 - 20 tons of cooling capacity.

### Features Included:

- Air-cooled, closed loop
- Indoor or outdoor styles available
- Digital temperature controller
- Hermetic compressor
- Brazed plate evaporator
- Hot gas regulator
- Fused disconnect
- Vertical air discharge
- Cleanable air filters
- Manual bypass
- Fluid level sight glass
- Seamless plastic tank

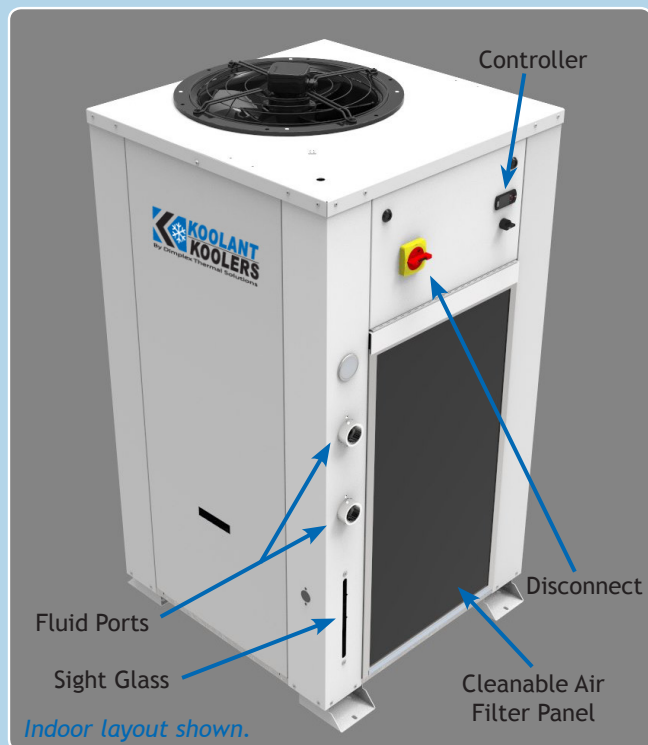

UL 1995 certification | 1 & month parts & labor warranty | 24/7 service & support

#### Indoor Style:

- Ambient 50° F - 95° F
- Water or water/glycol (70/30)
- Carel EZ digital controller
- RAL 7035 powdercoated cabinet

#### Outdoor Style:

- Outdoor Ambient -20° F to 95° F
- Water/glycol (70/30)
- Ranco ETC digital controller
- Galvanized sheet metal cabinet

#### High-Flow Package:

- Auto water fill
- Inlet water filter
- High flow pump

#### Options:


- Auto makeup
- Inlet water filter
- Remotely located controller
- Casters (indoor only)
- Service/maintenance packages

# 3 Ton S Series SPECIFICATIONS

Self-Contained Reliable Cooling

**INDUSTRIAL  
WATER CHILLER**

www.industrialwaterchiller.com



**T. J. SNOW**

www.tjsnow.com

120 Nowlin Ln., Chattanooga, TN 37421

(800) 669-7669 · chillers@tjsnow.com

S Series		3 TON			
		230/3/60 @45psi	230/3/60 @80psi	460/3/60 @45psi	460/3/60 @80psi
<b>Cooling</b>					
Refrigerant:	407C				
Compressor type:	Scroll compressor				
Condenser type:	Fin and tube				
<b>Climatic Data</b>					
Site of installation:	Indoor and Outdoor Models Available				
Ambient conditions:	Indoor: 50 to 95   Outdoor: -20 to 95				
Noise level:	74-76				
<b>Fluid Circuit</b>					
Cooling capacity (60Hz):	36,000				
Fluid temperature (outlet):	65 *				
Temperature stability:	3				
Cooling medium:	Indoor: water or water/glycol (70/30)   Outdoor: water/glycol (70/30)				
Flow rate:	10	10	10	10	gpm
Pump pressure:	45	80	45	80	psi
Tank:					
Capacity:	36				
Material construction:	Low density polyethylene				
Type:	Open to atmosphere				
Fluid Connections (FNPT):	1 1/2				
Wetted component material:	Non-Ferrous				
Evaporator:	Stainless steel copper brazed plate				
Gauge:	Pressure				
<b>Electrical Data</b>					
Voltage:	230		460		V
Phases:	3		3		~
Frequency:	60		60		Hz
Control:					
Voltage:	115				
Phases:	1				
Frequency:	60				
Certifications/Standards:	UL1995				
Full loaded amps:	26.1	28.1	12.3	13.3	amps
Controller type:	Indoor: Carel EZ / Outdoor: Ranco ETC				
<b>Additional Data</b>					
Chiller dimensions (WxDxH):	35 x 37 x 68				
Finish:	Indoor: RAL 7035 powdercoat / Outdoor: Galvanized				
Crated weight:	540				

\* This is the rated temperature. Temps can vary but will affect capacity - contact factory.